

# Jensen®

loudspeakers

## Vintage Ceramic

C 6 V 8Ω  
Code ZJ03050  
6" 20W

**LOWS:**  
Tight

**MIDS:**  
Firm

**HIGHS:**  
Smooth

**OVERDRIVE:**  
Crunchy

### Sound Features:

#### Guitarist Description:


Extremely versatile. Warm clean tone with top-end chime.

It remains strong and articulate when presented with overdrive distortion.

Specifications	
Nominal Diameter	165 mm (6")
Nominal Impedance	8 Ω
Rated Power AES <sup>(1)</sup>	20 W
Continuous Program Power <sup>(2)</sup>	40 W
Sensitivity @ 1W/1m	91.3 dB
Voice Coil Diameter	25 mm
Voice Coil Winding Depth	7 mm
Magnetic Gap Depth	5 mm
Flux Density	1.00 T
Magnet Weight	245 g
Net Weight	0.7 kg

Thiele & Small Parameters <sup>(3)</sup>			
Re	6.58 Ω	Fs	106.3 Hz
Qms	10.65	Mms	6.8 g
Qts	1.08	Bxl	4.00 Tm
Cms	327 μm/N	Sd	122.7 cm <sup>2</sup>
Vas	7.0 l	Le (1kHz)	0.48 mH

Constructive Characteristics	
Magnet	Ferrite
Basket Material	Pressed Sheet Steel
Voice Coil Winding Material	Copper
Voice Coil Former Material	Epotex
Cone Material	Paper
Surround Treatment	Yes
Surround Material	Paper - Integrated
Dust Dome Material	Non Treated Cloth

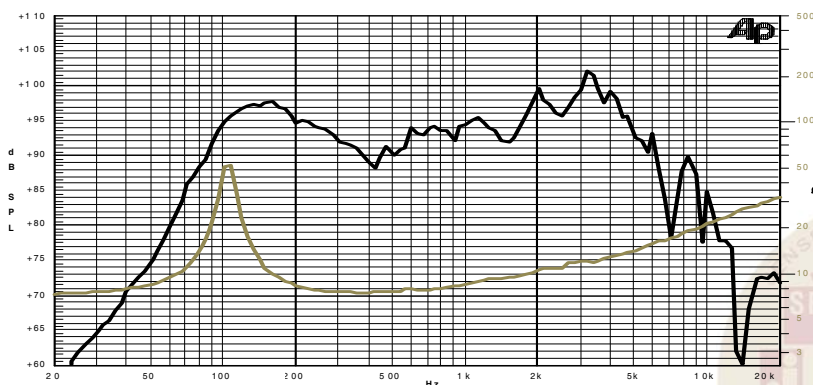

Note:


1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure

2: Power on Continuous Program is defined as 3 dB greater than the Rated Power

3: Thiele & Small parameters measured with laser system without preconditioning test

4: Drawing dimensions: mm

5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

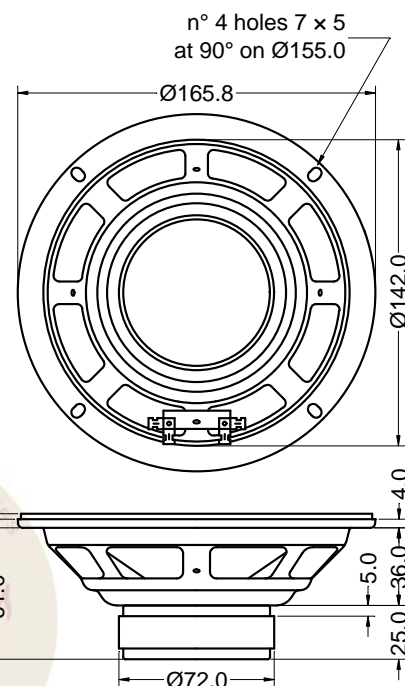

18/12/14