


CDX20-3020



- 2" exit lightweight, ferrite magnet compression driver with 3" copper clad aluminium voice coil
- 100Wrms (AES standard) power handling and 107dB sensitivity
- Next generation Sound Castle™ soft clamping assembly reduces diaphragm stress for decreased distortion and even greater reliability of performance
- Single piece titanium diaphragm and surround
- Finite element analysis (FEA) used to optimise magnetic, acoustic and electromechanical design

8 Frequency Response

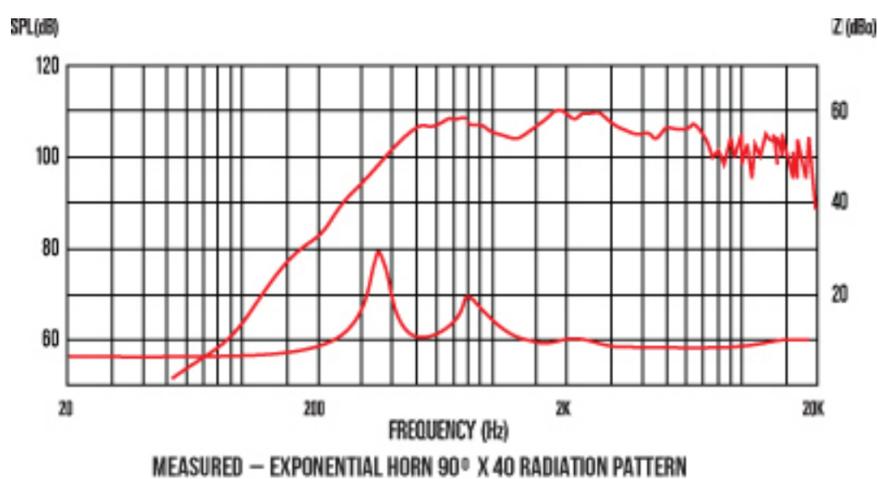

General Specifications

Power rating ¹	100Wrms
Nominal impedance	8
Frequency range	500Hz 18kHz
Sensitivity ²	107dB
Recommended min. crossover (12dB/oct)	800Hz
Voice coil diameter	75mm/3in
Voice coil material	Edgewound copper clad aluminium
Magnet type	Ferrite
Diaphragm material	Titanium
Surround material	Titanium

Mounting Information

Overall width	180mm/7in
Overall depth	68mm/2.7in
Fitting	Flange (4xM6 holes on 102mm /4in PCD)
Throat exit	50mm/2in
Unit weight	4.9kg/10.2lb