

ECC802S

A. F. twin triode with separate cathodes, non microphonic
Base: NOVAL

$$U_f = 6,3 \text{ V}/12,6 \text{ V}$$
$$I_f = \text{ca. } 300/150 \text{ mA}$$

Typical characteristic:

$$U_a = 250 \text{ V}$$
$$R_k = 800 \Omega$$
$$I_a = 10,5 \text{ mA}$$
$$S = 2,2 \text{ mA/V}$$
$$R_i = 7,7 \text{ k}\Omega$$
$$\mu = 17$$

Limiting values:

$$U_a = 330 \text{ V}$$
$$W_a = 3 \text{ W}$$
$$I_k = 22 \text{ mA}$$
$$U_g = -55 \text{ V}$$
$$R_g = 1 \text{ M}\Omega$$
$$U_{k/f} = 100 \text{ V}$$

Capacitances:

system I.	system II.
$C_{g/k} = 1,6$	$C_{g/k} = 1,6 \text{ pF}$
$C_a = 0,5$	$C_a = 0,4 \text{ pF}$
$C_{g/a} = 1,5$	$C_{g/a} = 1,5 \text{ pF}$

NEW

Dimension and connections:




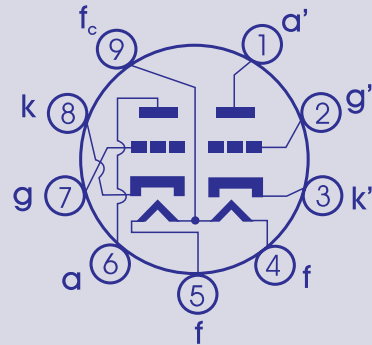




PLATE CHARACTERISTICS

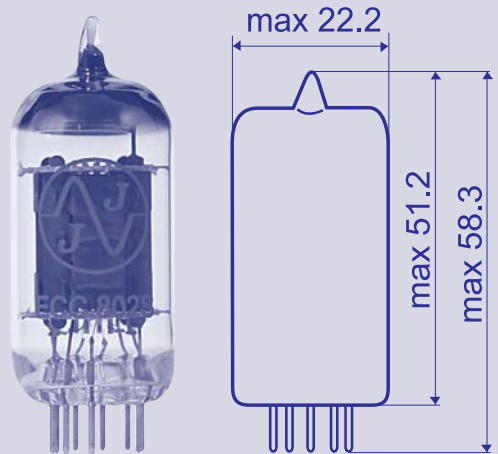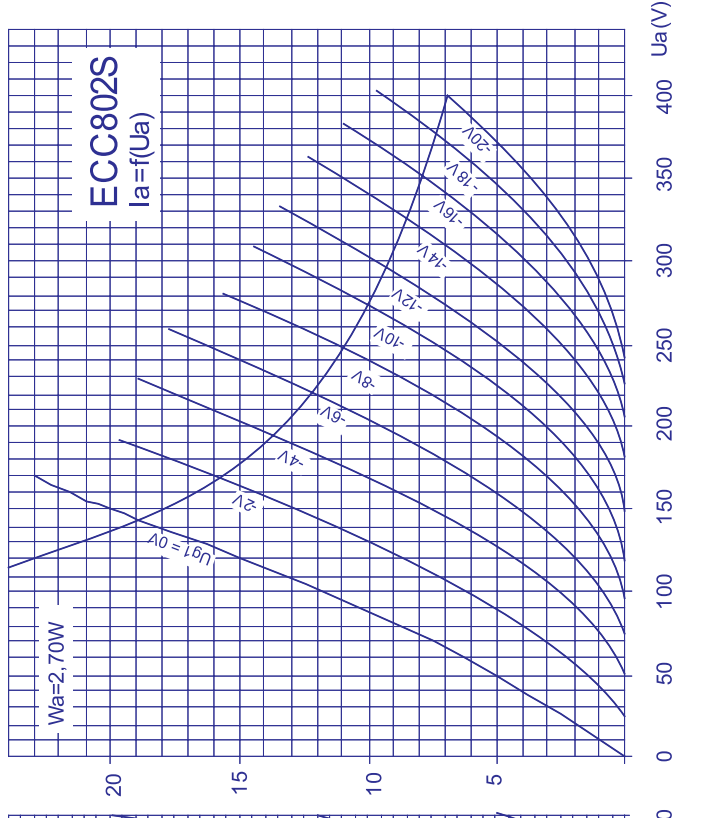

TRANSFER CHARACTERISTICS

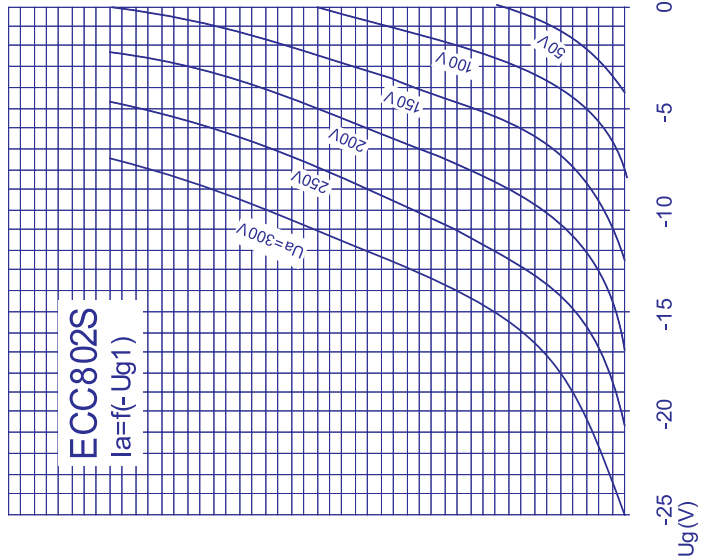

Excellence with every decibel

Excellence with every decibel

Excellence with every decibel