
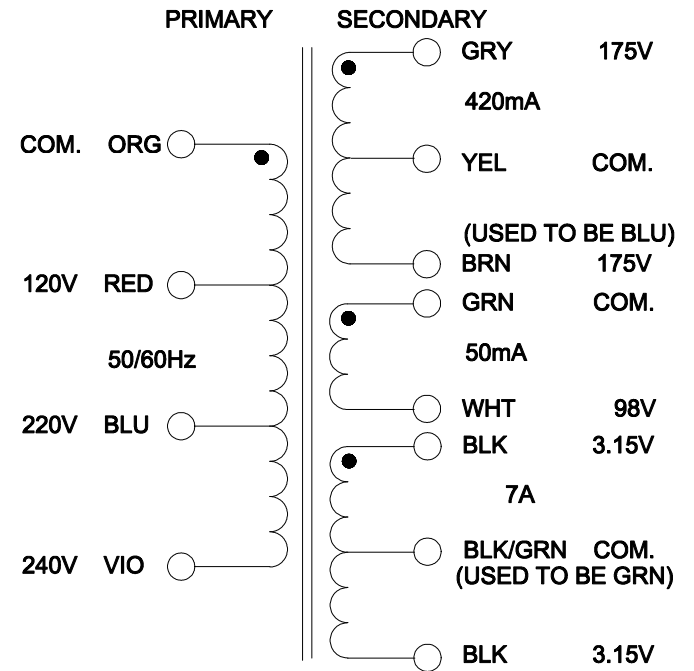


DIMENSIONS:	
A	4.500" ±0.063
B	3.750" ±0.063
C1	1.850" ±0.063
C2	3.900" ±0.125
D	3.750" ±0.063
E	3.000" ±0.063
G	1.000" ±0.250

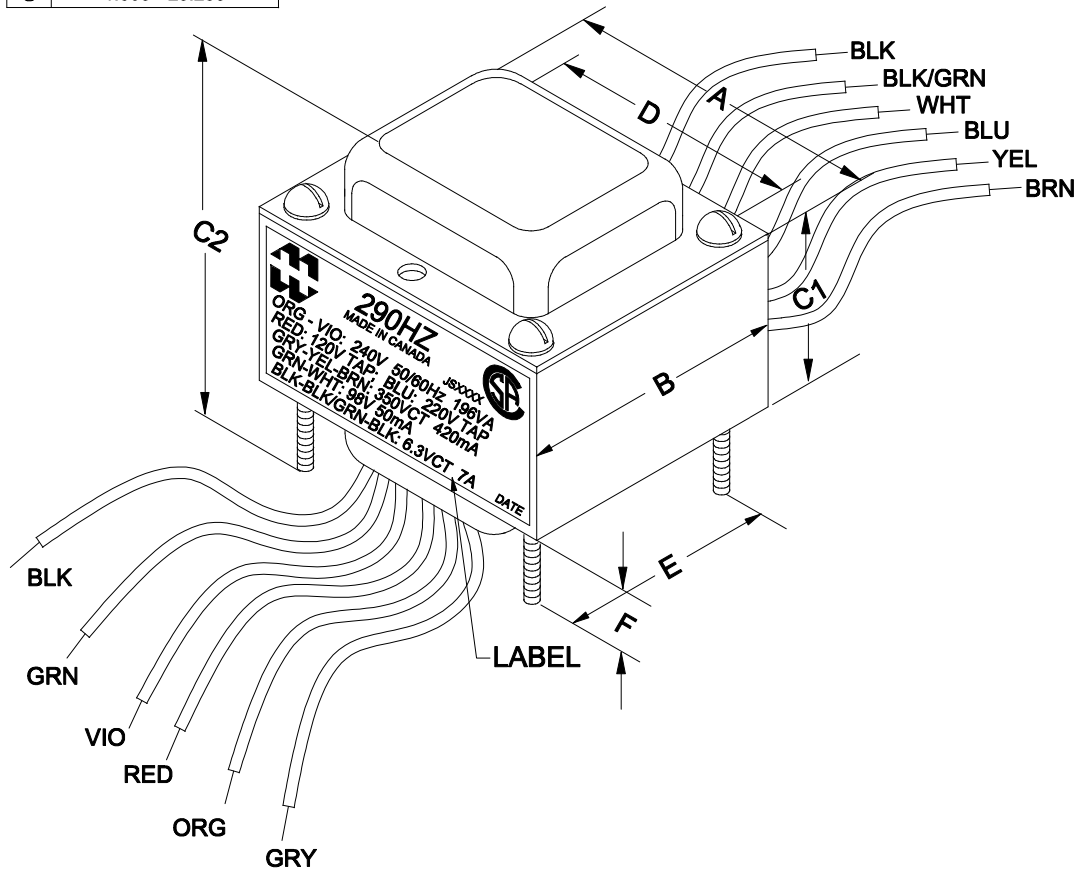

NOTE: ALL LEADS 16.0" MIN. OUT. STRIP 0.5"

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, ORG - RED	202mA	Max.
Sec. N.L.V	@ 120V, 60Hz, ORG - RED		
	ORG - BLU =	219.6V	±2%
	ORG - VIO =	239.5V	±2%
	GRY - YEL = YEL - BRN =	183.6V	±2%
	GRY - BRN =	367.1V	±2%
	GRN - WHT =	102.9V	±2%
	BLK - BLK/GRN = BLK/GRN - BLK =	3.320V	±2%
	BLK - BLK =	6.640V	±2%
DCR	@ 20°C, ORG - VIO =	4.294 Ω	±20%
	@ 20°C, GRY - BRN =	24.10 Ω	±20%
	@ 20°C, GRN - WHT =	57.19 Ω	±20%
	@ 20°C, BLK - BLK =	0.029 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED. C.I.	11/29/18

HAMMOND MANUFACTURING ELECTRONIC DIVISION
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290HZ
DATE: 11/29/18	APP'D. BY:		
	DIMENSIONS: IN(X) MM()		